


Mar 2013

Application Guidelines for Balance Weights on Dura-Flange® Wheels

Clip-on balance weights are not recommended on Alcoa Dura-Flange® wheels. The usage of clip-on style balance weights will not adequately engage the hardened Dura-Flange® coating. The weights may “fly off” due to the inability to grip to the Dura-Flange® hardened coating, potentially causing damage to the vehicle or personal injury.

Alcoa recommends adhesive style balance weights for this application requiring Dura-Flange® wheels. Adhesive weights should be applied only to a clean surface on the brake side of the wheel rim. Please see the graphics below for recommended placement of adhesive balance weights on Alcoa wheels.

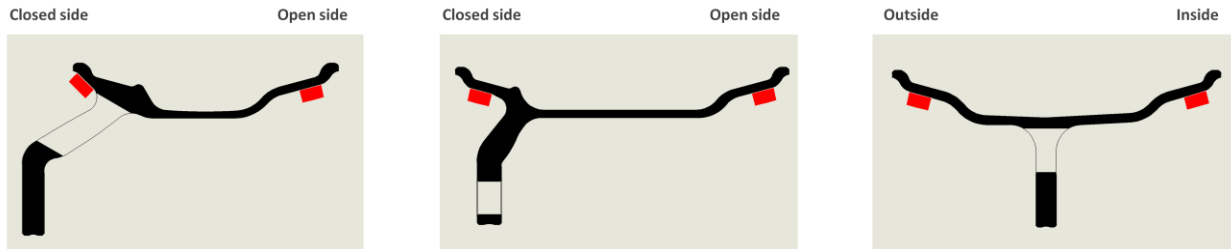

NOTE: These weights should be installed only in a location where they will not contact the brake components during vehicle operation.

If you have any questions regarding the correct usage of balance weights for your application, please contact an Alcoa Sales Representative or call 800.242.9898.