




# Increase Durability and Wear Resistance

Alcoa® Dura-Flange® Wear Protection Wheels have a proprietary treatment on the wheel rim that provides a protective shield to prevent rim wear. It more than doubles the life over a standard aluminum wheel in applications like transit, bus, tanker and heavy hauling where loads are heavy and prone to shifting, causing tire walls to rub against the wheel rims.

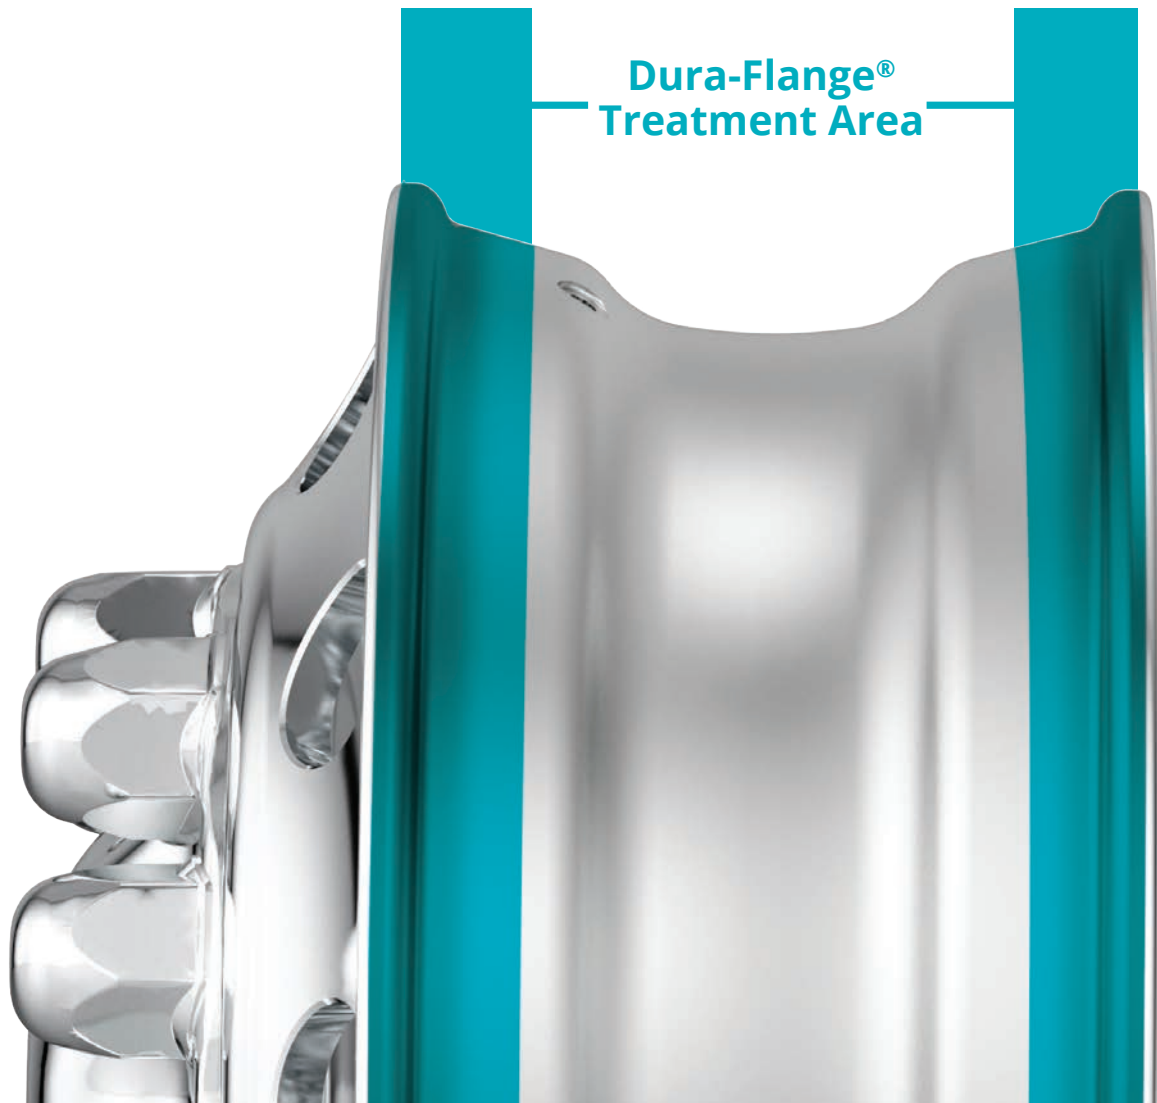

## Alcoa® Dura-Flange® Wear Protection Wheels

88565x, 89U64x, 84U61x, 98U63x, 98565x, 88651x, 88652x, 89651x

Follow Us:



# Alcoa® Dura-Flange® Wear Protection Wheels

88565x, 89U64x, 84U61x, 98U63x, 98565x, 88651x, 88652x, 89651x



## Road Tested

Alcoa® Dura-Flange® Wear Protection Wheels exhibit no signs of rim flange wear up to 240,000 miles of testing under extreme conditions.

## Increase Durability and Wear Resistance

The proprietary protection system offers enhanced performance and productivity and delays replacement costs for many more miles.

## Additional Benefits

- One piece forged aluminum wheel strength that's 5x stronger than steel.
- True cool running extends tire and brake life.
- Same five year limited warranty on the wheels, along with a two-year warranty on the flange treatment.



## WHEEL SPECIFICATIONS

Alcoa® aluminum disc wheel mounting dimensions are consistent with SAE Recommended Practice J694 June 2007.

Bolt Holes, Bolt Circle, Hub Bore	Size (in)	P/N	Weight (lbs)	Finish Options	SURFACE TREATMENTS		Bolt Hole Dia.	OFFSET		LOAD RATING		Valve Stem
					Dura-Flange®	Dura-Bright® Dura-Flange®		Outset (in)	Inset (in)	Max Load (lbs)	Max Infl. PSI	
10 Holes 285.75mm Bolt Circle 220.1mm Hub Bore	22.5 x 8.25	88565x	50	1, 2, 7	7DF	1DD, 2DD, 3DD	26mm	6.60	5.71	8050	130	005544, 005544BLK
	22.5 x 9	89U64x	56	1, 2, 3, 7		3DD	26mm	6.94	5.99	10000	130	005544, 005544BLK
	22.5 x 14	84U61x	49	2, 7	7DF	2DD	26mm	N/A	0	12800	130	005535
	24.5 x 8.25	98U63x	51	1, 2, 7	7DF		26mm	6.60	5.77	7400	130	005554, 005554BLK
	24.5 x 8.25	98565x	62	1, 2, 7	7DF		26mm	6.60	5.61	8300	130	005554, 005554BLK
10 Holes 335mm Bolt Circle 281.2mm Bore	22.5 x 8.25	88651x	50	0, 7		0DD, 3DD	32mm	6.60	5.75	8050	130	007007
	22.5 x 8.25	88652x	50	7		3DD	26mm	6.60	5.75	8050	130	007007
	22.5 x 9	89651x	51	0, 7		0DD	32mm	6.93	6.08	9090	130	007007



TAKE A LOOK AT THE COMPLETE ALCOA® WHEELS SPEC GUIDE.

### FINISH OPTIONS

- 1 Mirror Polish – steer/outside only
  - 2 Mirror Polish – inside only
  - 3 Mirror Polish – both sides
  - 7 High Polish – both sides as applicable
  - 8 High Polish – both sides as applicable
- Reference data table for offset position

### SURFACE TREATMENTS

- DB Dura-Bright® Surface Treatment
- DF Dura-Flange® Wear Protection
- DD Dura-Bright® and Dura-Flange® Wear Protection
- BLK Dura-Black™ Surface Treatment

° 0 and 7 finish options are determined by inset or outset mounting positions and may not be finished on both sides. See chart for position and available finish options.

